



**PRELIMINARY VISUAL AID ONLY  
NOT FOR CONSTRUCTION**

|               |            |
|---------------|------------|
| Date          | 08/11/2025 |
| Designer      | BC         |
| Revision Date | 08/11/2025 |
| Revision #    | 4          |

**OmniTrack Project Details**

|                  |                          |
|------------------|--------------------------|
| Customer         | Sun Tribe                |
| Project Name     | Calendon                 |
| Address          | Calendon Rd              |
| Coordinates      | 38.346475,<br>-77.130623 |
| City, State, Zip | King George,<br>VA 22485 |

|                       |     |   |
|-----------------------|-----|---|
| ASCE 7-16 Wind & Snow | 105 | 0 |
|-----------------------|-----|---|

|               |    |
|---------------|----|
| Risk Category | 25 |
|---------------|----|

|                |                            |
|----------------|----------------------------|
| Module 1 Brand | Qpeak Duo<br>XL-G11S.3/BFG |
|----------------|----------------------------|

|               |     |
|---------------|-----|
| Module 1 Size | 590 |
|---------------|-----|

|              |       |
|--------------|-------|
| Module 1 Qty | 20250 |
|--------------|-------|

|                   |     |
|-------------------|-----|
| Row Spacing Mod 1 | 20' |
|-------------------|-----|

|                   |    |
|-------------------|----|
| String Size Mod 1 | 25 |
|-------------------|----|

|                  |     |
|------------------|-----|
| String Qty Mod 1 | 810 |
|------------------|-----|

|                |                            |
|----------------|----------------------------|
| Module 2 Brand | QPeak Duo<br>ML-G12S.3-BFG |
|----------------|----------------------------|

|               |     |
|---------------|-----|
| Module 2 Size | 660 |
|---------------|-----|


|              |       |
|--------------|-------|
| Module 2 Qty | 22050 |
|--------------|-------|

|                   |     |
|-------------------|-----|
| Row Spacing Mod 2 | 20' |
|-------------------|-----|

|                   |    |
|-------------------|----|
| String Size Mod 2 | 30 |
|-------------------|----|

|                  |     |
|------------------|-----|
| String Qty Mod 2 | 735 |
|------------------|-----|

|                           |          |
|---------------------------|----------|
| Total Project Size (W DC) | 26500500 |
|---------------------------|----------|

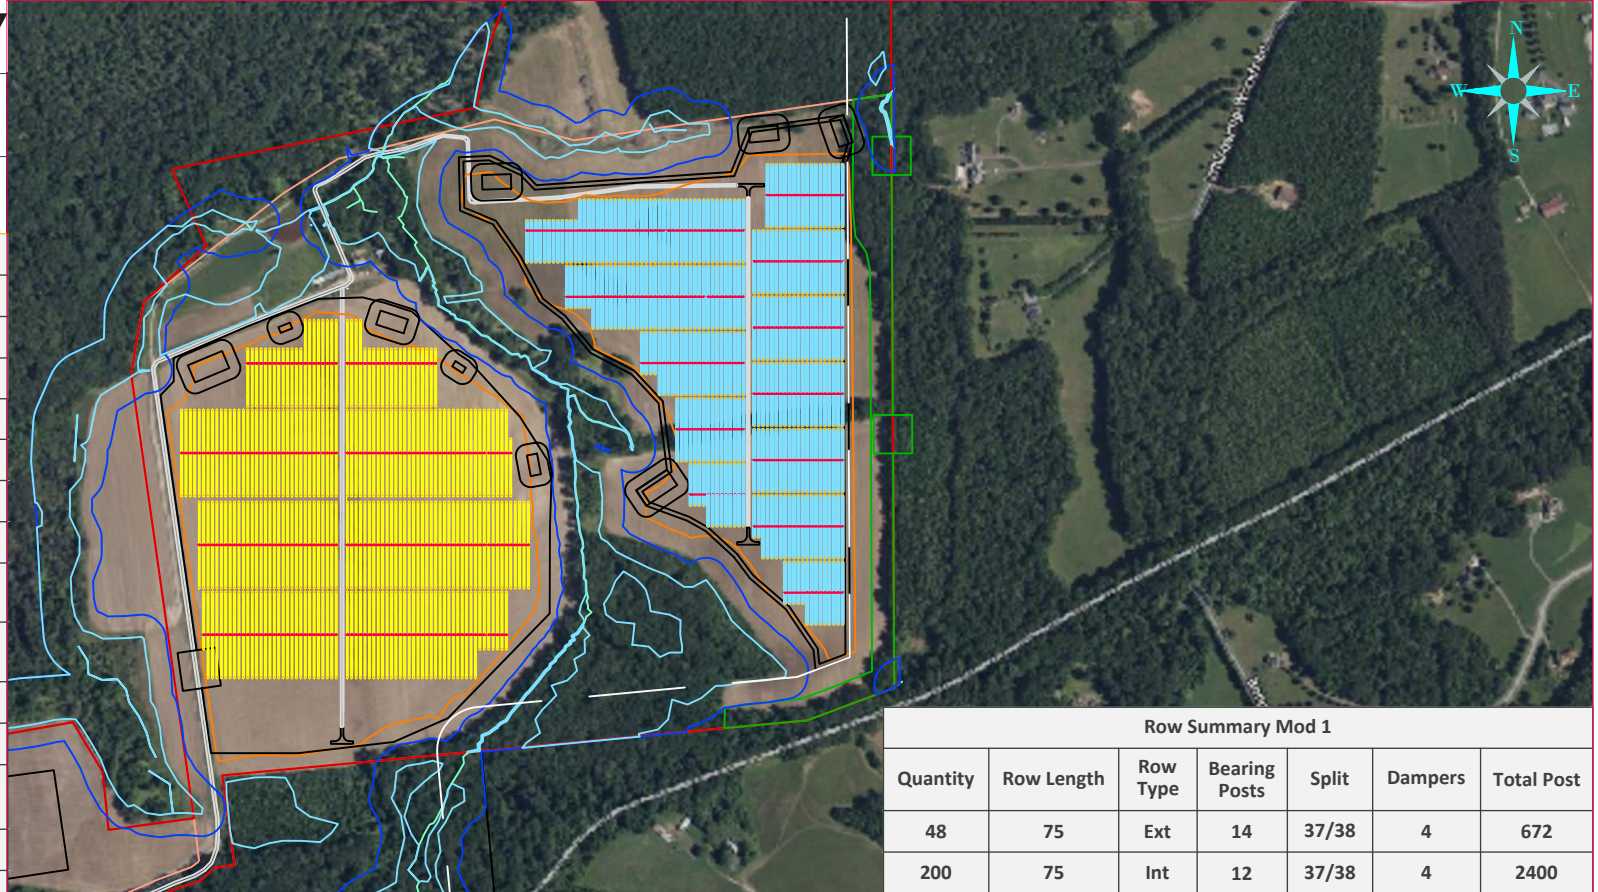

| Foundation Post Summary |          |
|-------------------------|----------|
| Type                    | Quantity |
| Bearing                 | 7466     |
| Gear                    | 539      |

|                 |    |
|-----------------|----|
| Driveline Angle | 0  |
| Motor Qty       | 26 |

| Additional Information Mod 1 G11 |                  | Additional Information Mod 2 G12 |                  |
|----------------------------------|------------------|----------------------------------|------------------|
| Damper Type                      | Coil Over Damper | Damper Type                      | Coil Over Damper |
| HD Bearings                      | Yes              | HD Bearings                      | No               |
| Center/CAB Gap                   | 30" Centered     | Center/CAB Gap                   | 30" Centered     |
| Clamp Types A/B Regions          | 1400mm TB        | Clamp Types A/B Regions          | 1400mm TB        |
| Clamp Types C/D Regions          | 400mm TB         | Clamp Types C/D Regions          | 1400mm TB        |
| Bearing Gaps                     | No               | Bearing Gaps                     | Single A/B Gaps  |

| Row Summary Mod 1 |            |          |               |       |         |            |
|-------------------|------------|----------|---------------|-------|---------|------------|
| Quantity          | Row Length | Row Type | Bearing Posts | Split | Dampers | Total Post |
| 48                | 75         | Ext      | 14            | 37/38 | 4       | 672        |
| 200               | 75         | Int      | 12            | 37/38 | 4       | 2400       |
| 2                 | 50         | Ext      | 10            | 12/38 | 4       | 20         |
| 10                | 50         | Int      | 9             | 12/38 | 4       | 90         |
| 10                | 50         | Ext      | 10            | 37/13 | 4       | 100        |
| 11                | 50         | Int      | 9             | 37/13 | 4       | 99         |
| Row Summary Mod 2 |            |          |               |       |         |            |
| 32                | 90         | Ext      | 20            | 45/45 | 4       | 640        |
| 187               | 90         | Int      | 16            | 45/45 | 4       | 2992       |
| 5                 | 60         | Ext      | 14            | 15/45 | 4       | 70         |
| 26                | 60         | Int      | 11            | 15/45 | 4       | 286        |
| 3                 | 60         | Ext      | 14            | 45/15 | 4       | 42         |
| 5                 | 60         | Int      | 11            | 45/15 | 4       | 55         |